CAMSO TLH 792S

FORMERLY SOLIDEAL SOLIDAIR TLH





EXTREME-DUTY FLAT-FREE TIRE SOLUTION

An extreme-duty solid telehandler tire. With optimized stability, durability and comfort, it delivers flat-free operation and traction in extreme applications.

PERFORMANCE

TIRE LIFE PUNCTURE RESISTANCE





CAMSO TLH 792S



ENGINEERED SOLID TIRE SOLUTION

 Provides flat-free operation and ultimate durability

MASSIVE TREAD DEPTH

■ Improves durability and traction

PATENTED TRIANGULAR APERTURE DESIGN


Optimizes stability, strength and comfort

HAULER STEPPED TREAD DESIGN

Provides excellent cleanout for improved traction

TIRE SIZE	TREAD PATTERN	RIM SIZE	TIRE DIMENSIONS			LOAD CAPACITY			
			O.D. [mm] <i>[in]</i>	0.W. [mm] <i>[in]</i>	0.T.D. [mm] [32nd]	Other vehicles			Static
						6 km/h 4 mph	10 km/h 6 <i>mph</i>	25 km/h 16 mph	0 km/h <i>0 mph</i>
13.00-24	TLH	8.50V-24	1290	330	70	7650	6950	6375	9625
			50,8	13,0	88	16900	15350	14050	21250
14.00-24	TLH	8.50V-24	1330	350	88	8460	7685	7050	10645
			52,4	13,8	111	18700	16950	15550	23500

CAMSOTLH 792S PERFORMANCE vs FOAM-FILLED AIRTIRE

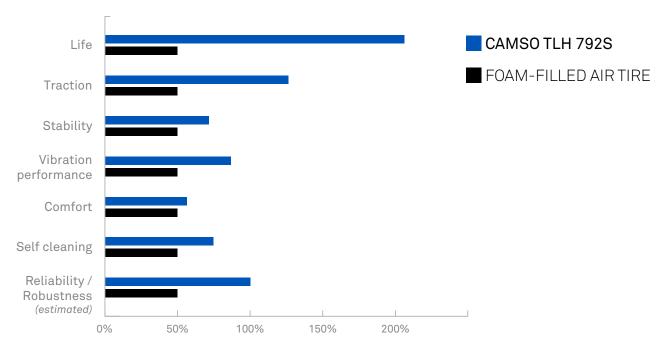

AUTHORIZED DISTRIBUTOR:

camso.co

